


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2015/863/EU



### TO-220AB

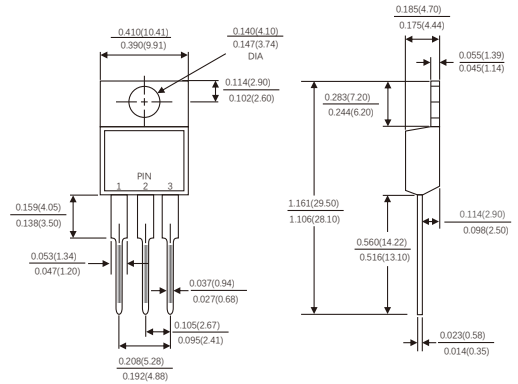

### MECHANICAL DATA

- Case: JEDEC TO-220AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750,method 2026
- Polarity: As marked
- Mounting Position: Any

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

| Parameters                                                                                                    | Symbols                   | MUR 2020CT     | MUR 2040CT | MUR 2060CT | Units |
|---------------------------------------------------------------------------------------------------------------|---------------------------|----------------|------------|------------|-------|
| Maximum repetitive peak reverse voltage                                                                       | $V_{RRM}$                 | 200            | 400        | 600        | Volts |
| Maximum RMS voltage                                                                                           | $V_{RMS}$                 | 140            | 280        | 420        | Volts |
| Maximum DC blocking voltage                                                                                   | $V_{DC}$                  | 200            | 400        | 600        | Volts |
| Maximum average forward rectified current(see Fig.1)                                                          | Per leg                   | I(AV)          | 10.0       |            | Amps  |
|                                                                                                               | Total device              |                | 20.0       |            |       |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load Total device (JEDEC method) | $I_{FSM}$                 | 200            |            |            | Amps  |
| Maximum instantaneous forward voltage at 10.0 A per leg(Note 1)                                               | $V_F$                     | 0.975          | 1.3        | 1.7        | Volts |
| Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)                                    | $T_j = 25^\circ\text{C}$  | I <sub>R</sub> | 5          |            | μA    |
|                                                                                                               | $T_j = 125^\circ\text{C}$ |                | 250        |            |       |
| Maximum Reverse Recovery Time (Note 2)                                                                        | $T_{rr}$                  | 35             |            |            | ns    |
| Typical thermal resistance Total device (Note 3)                                                              | $R_{\theta JC}$           | 1.25           |            |            | °C/W  |
| Operating junction temperature range                                                                          | $T_j$                     | -55 to+150     |            |            | °C    |
| Storage temperature range                                                                                     | $T_{STG}$                 | -55 to+150     |            |            | °C    |

- Notes: 1. Pulse test: 300μs pulse width,1% duty cycle  
 2. Reverse recovery test conditions  $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$   
 3. Thermal resistance from junction to case

FIG.1-FORWARD CURRENT DERATING CURVE

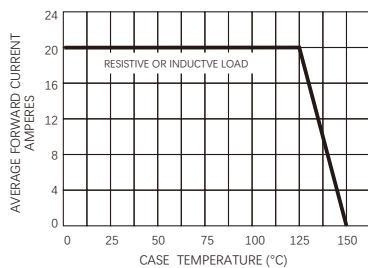


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

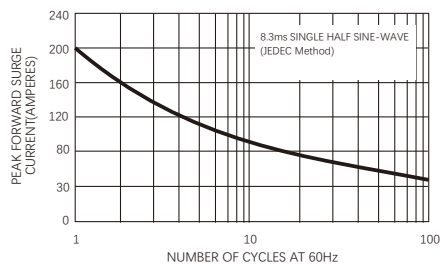


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

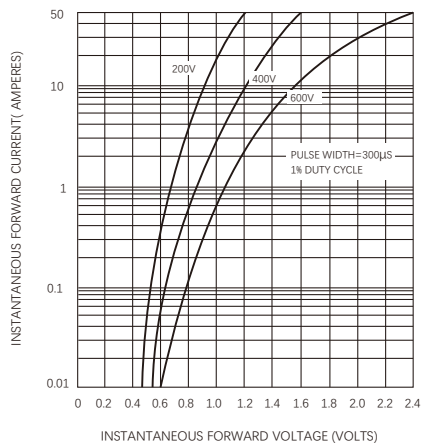


FIG.4-TYPICAL REVERSE CHARACTERISTICS

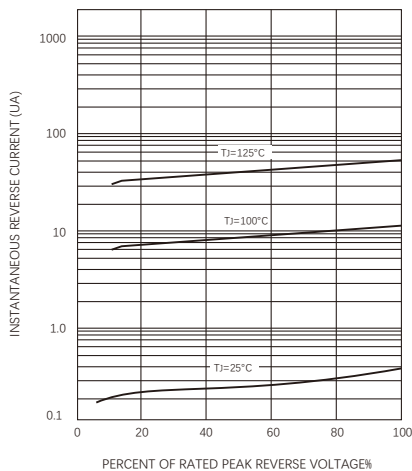


FIG.5-TYPICAL JUNCTION CAPACITANCE


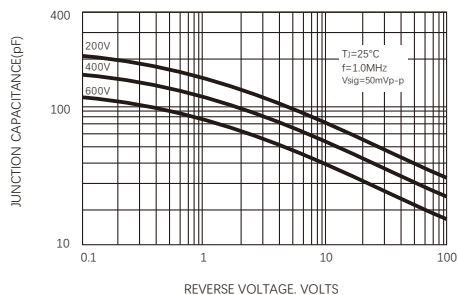


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

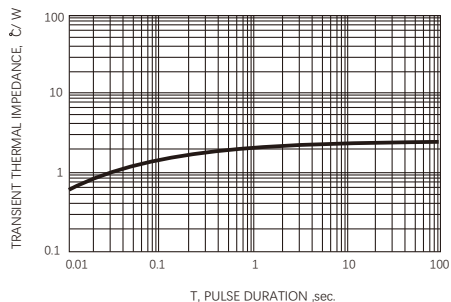

## Friendship Reminder

- JiNan JingHeng (hereinafter referred to as JH) reserves the right to make changes to this document and its products and specifications at anytime without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- JH makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does JH assume any liability for application assistance or customer product design.
- JH does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of JH.
- JH's products are not authorized for use as critical components in life support devices or systems without express written approval of JH.